



SECTION I: TOOL STRING

Type 'AO' Rope Sockets: 3/8" - 2 1/2"

Rebco Type 'AO' Rope Sockets are recommended to be used with .066" to .105" diameter Single Strand Wire.

The Wireline should be passed through the Body, Spring and Support, before being wrapped tightly around the groove of the Disc.

TECHNICAL DATA

NOMINAL SIZE	3/8"	1/2"	5/8"	3/4"	7/8"
ASSEMBLY NUMBER	10000200370	10000200500	10000200620	10000200750	10000200870

ENGINEERING DATA:


FISHING NECK OD	0.375	.500"	.500"	.687"	.750"
BOX THREAD CONNECTION	1/4" - 20	3/8" - 16	3/8" - 16	1/2" - 13	5/8" - 11
MAXIMUM OD	.38"	.50"	.63"	.75"	.88"
LENGTH	4.06"	4.50"	4.50"	3.12"	3.12"
MATERIAL	Alloy	Alloy	Alloy	Alloy	Alloy

TECHNICAL DATA

NOMINAL SIZE	1"	1 1/4"	1 1/2"	1 3/4"	1 7/8"
ASSEMBLY NUMBER	10000201000	10000201250	10000201500	10000201750	10000201870

ENGINEERING DATA:

FISHING NECK OD	1.000"	1.187"	1.375"	1.750"	1.750"
BOX THREAD CONNECTION	5/8" - 11	15/16" - 10	15/16" - 10	1 1/16" - 10	1 1/16" - 10
MAXIMUM OD	1.00"	1.25"	1.38"	1.75"	1.88"
LENGTH	6.88"	5.56"	5.56"	5.56"	5.56"
MATERIAL	Alloy	Alloy	Alloy	Alloy	Alloy

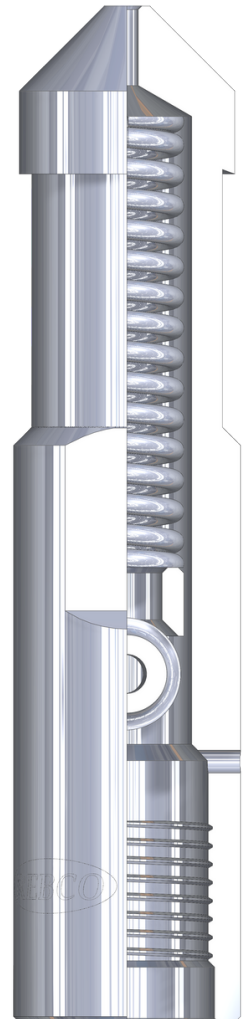




SECTION I: TOOL STRING

Type 'AO' Rope Sockets: continued

TECHNICAL DATA				
NOMINAL SIZE	2"	2 1/8"	2 1/4"	2 1/2"
ASSEMBLY NUMBER	10000202000	10000202120	10000202250	10000202500
ENGINEERING DATA:				
FISHING NECK OD	1.750"	1.750"	1.750"	2.313"
BOX THREAD CONNECTION	1 1/16" - 10	1 1/16" - 10	1 1/16" - 10	1 9/16" - 10
MAXIMUM OD	2.00"	2.12"	2.25"	2.50"
LENGTH	5.56"	5.56"	5.56"	6.50"
MATERIAL	Alloy	Alloy	Alloy	Alloy

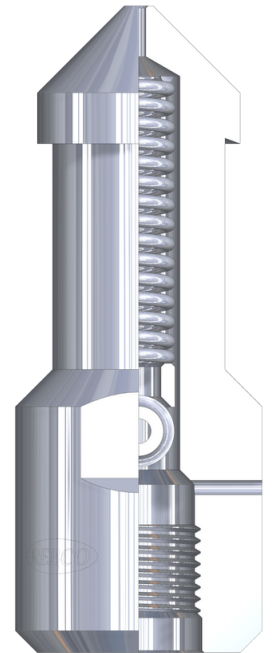

Note: 3/8" and 1/2" Type 'AO' Rope Sockets are offered with Set Screws Only