



SECTION I: TOOL STRING

Type 'CO' Rope Sockets: 1 1/4" – 2 1/2"


Rebco Type 'CO' Rope Sockets are designed for use with small, stranded lines up to 5/16" diameter.

Type 'CO' Rope Sockets is made up of Body, Bottom Sub, Carriage, Slips and Set Screw.

The Slips are designed to cause the line to break under severe loading at a specific percentage of the full line tensile strength.

If during the downhole operations the Tool String gets stuck, the operator is assured that the line will break at the Rope Socket, rather than up-hole, allowing retrieval of the Wireline.

Type 'CD' Rope Sockets are available - with 'QLS' Rebco 'RQLD' bottom connection. Must be ordered by Wire Size in use and Slips (80% is most common).

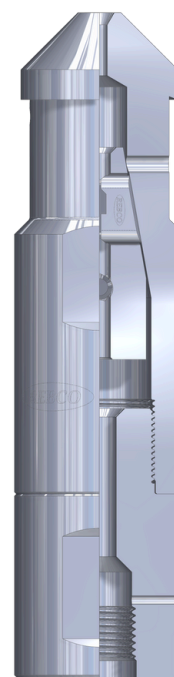

TECHNICAL DATA

NOMINAL SIZE	1 1/4"	1 1/2"	1 3/4"
ASSEMBLY NUMBER	1000220125_	1000220150_	1000220175_

ENGINEERING DATA:

FISHING NECK OD	1.375"	1.375"	1.750"
BOX CONNECTION	15/16" - 10	15/16" - 10	1 1/16" - 10
MAXIMUM OD	1.25"	1.50"	1.75"
LENGTH	8.50"	8.50"	8.50"
MATERIAL	Alloy	Alloy	Alloy

TECHNICAL DATA

NOMINAL SIZE	1 7/8"	2 1/8"	2 1/2"
ASSEMBLY NUMBER	1000220187_	1000220212_	1000220250_

ENGINEERING DATA:

FISHING NECK OD	1.750"	1.750"	2.313"
BOX CONNECTION	1 1/16" - 10	1 1/16" - 10	1 1/16" - 10
MAXIMUM OD	1.88"	2.12"	2.50"
LENGTH	8.50"	8.50"	8.50"
MATERIAL	Alloy	Alloy	Alloy

* Assembly Number is determined by Wire Size, See Wire Size Chart