



SECTION XV: EQUALIZING SUB-ASSEMBLIES
and ACCESSORIES


Type 'ROTF' Equalizing Sub: 2" – 3"

Rebco Type 'ROTF' Equalizing Subs are to be used with Sub-Surface Controls such as Locking Mandrels. Type 'ROTF' Equalizing Subs can be supplied with 2 or 3 Orifice Ports.

These Sub-Assemblies are designed to allow pressure differentials to be equalized across the Lock Mandrels and Flow controls before attempting to retrieve them.

NOTE: These types of Equalizing Subs require running/pulling equalizing prongs.

TECHNICAL DATA			
NOMINAL SIZE	2"	2 1/2"	3"
ASSEMBLY NUMBER	2025202000	2025202500	2025203000
ENGINEERING DATA:			
MAXIMUM OD	1.74"	2.12"	2.62"
MINIMUM ID	.53"	.72"	1.16"
EFFECTIVE AREA THRU ORIFICE PLATE	.011"	.011"	.011"
BOX THREAD CONNECTION	1 3/16" - 14	1 9/16" - 12	2" - 12
PIN THREAD CONNECTION	1 3/16" - 14	1 9/16" - 12	2" - 12
LENGTH	4.25"	4.25"	4.25"
MATERIAL	Stainless	Stainless	Stainless

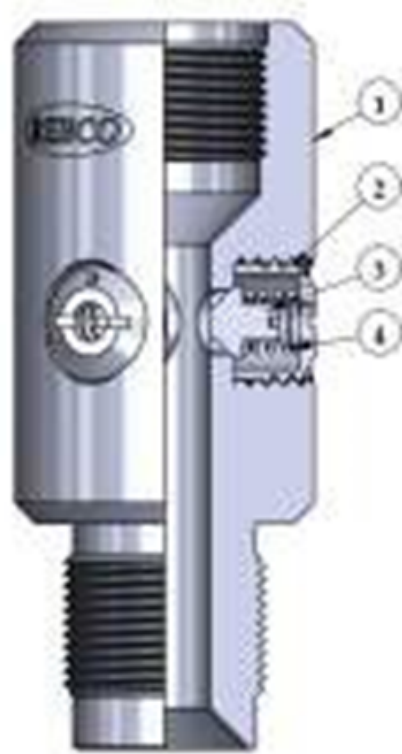

Type 'ROTF'