



SECTION III: RUNNING TOOLS

Type 'ROTC-2' Running Tool Assembly: 1.900" – 3 1/2"

Rebco Type 'ROTC-2' Running Tool is used to locate any one of the selective seal profiles in the well that accept accessories equipped with 'ROTS-1' or 'ROTS-2' Lock Sub-Assembly.

The flexibility of the Collet (DET 2) acts a locator of the Seal Bore.

TECHNICAL DATA

NOMINAL SIZE	1.900" - 2 1/16"			
ACCESSORY SIZE	1.43"	1.50"	1.56"	1.62"
ASSEMBLY NUMBER	410221430	410221500	410221560	410221620

ENGINEERING DATA:


MAXIMUM OD (NO-GO)	1.470"	1.533"	1.595"	1.658"
PIN THREAD CONNECTION	5/8" - 11	5/8" - 11	5/8" - 11	5/8" - 11
BOX (INSIDE) THREAD	5/8" - 11	5/8" - 11	5/8" - 11	5/8" - 11
FISHING NECK OD	1.000"	1.000"	1.000"	1.000"
LENGTH	10.88"	10.88"	10.88"	10.88"
MATERIAL	Alloy	Alloy	Alloy	Alloy

TECHNICAL DATA

NOMINAL SIZE	2 3/8"		
ACCESSORY SIZE	1.78"	1.81"	1.87"
ASSEMBLY NUMBER	410221780	410221810	410221870

ENGINEERING DATA:

MAXIMUM OD (NO-GO)	1.808"	1.845"	1.908"
PIN THREAD CONNECTION	15/16" - 10	15/16" - 10	15/16" - 10
BOX (INSIDE) THREAD	3/4" - 16	3/4" - 16	3/4" - 16
FISHING NECK OD	1.375"	1.375"	1.375"
LENGTH	11.25"	11.25"	11.25"
MATERIAL	Alloy	Alloy	Alloy

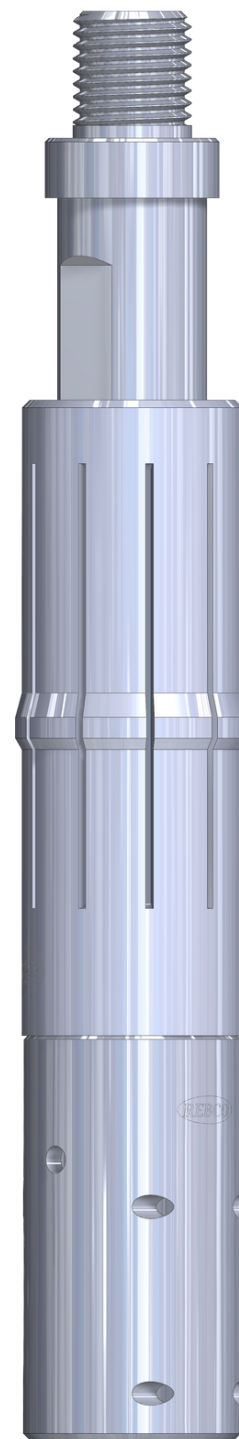



SECTION III: RUNNING TOOLS

Type 'ROTC-2' Running Tool Assembly:

TECHNICAL DATA					
NOMINAL SIZE	2 7/8"		3 1/2"		
ACCESSORY SIZE	2.25"	2.31"	2.56"	2.75"	2.81"
ASSEMBLY NUMBER	410222250	410222310	410222560	410222750	410222810
ENGINEERING DATA:					
MAXIMUM OD (NO-GO)	2.281"	2.343"	2.596"	2.786"	2.845"
PIN THREAD CONNECTION	15/16" - 10	15/16" - 10	15/16" - 10	15/16" - 10	15/16" - 10
BOX (INSIDE) THREAD	1" - 14	1" - 14	1" - 14	1" - 14	1" - 14
FISHING NECK OD	1.375"	1.375"	1.375"	1.375"	1.375"
LENGTH	12.44"	12.44"	12.44"	12.44"	12.44"
MATERIAL	Alloy	Alloy	Alloy	Alloy	Alloy