



SECTION XV: EQUALIZING SUB-ASSEMBLIES and ACCESSORIES

Type 'ROTPR' Equalizing Prong and Valve Sub-Assembly: 1.781" – 4.813"

Rebco Type 'ROTPR' Equalizing Prong and Valve Sub-Assembly, when attached to Type 'ROTR' and/or 'ROTRN' Lock Mandrel Assembly, converts the Lock Mandrel to a Plug Choke, with equalizing device, capable of holding pressure differentials from above or below.

Product Code: 24

TECHNICAL DATA

NIPPLE SEAL BORE	1.781"	1.875"	2.000"	2.125"
SUB-ASSEMBLY NUMBER	24111317830	24111318730	24111320030	24111321230

ENGINEERING DATA:


MAXIMUM OD (NO-GO)	1.776"	1.870"	1.995"	2.120"
BOX THREAD CONNECTION	1 3/8" - 14	1 3/8" - 14	1 3/8" - 14	1 3/8" - 14
PRONG FISHING NECK SIZE	1.187"	1.187"	1.187"	1.187"
PRONG LENGTH	22.4"	22.4"	22.4"	22.4"
LENGTH	24.71"	24.71"	24.71"	24.71"
'V' PACKING OD	.818"	.818"	.818"	.818"
PRONG RUNNING / PULLING TOOL	4014011500	4014011500	4014011500	4014011500
MATERIAL *	Norm Alloy	Norm Alloy	Norm Alloy	Norm Alloy

TECHNICAL DATA

NIPPLE SEAL BORE	2.188"	2.313"	2.562"	2.750"
SUB-ASSEMBLY NUMBER	24111321830	24111323130	24111325630	24111327530

ENGINEERING DATA:

MAXIMUM OD (NO-GO)	2.183"	2.308"	2.557"	2.745"
BOX THREAD CONNECTION	1 3/4" - 12	1 3/4" - 12	2" - 12 SLB	2 1/4" - 12 SLB
PRONG FISHING NECK SIZE	1.375"	1.375"	1.375"	1.375"
PRONG LENGTH	24.75"	24.75"	23.46"	25.0"
LENGTH	27.34"	27.34"	25.74"	28.0"
'V' PACKING OD	.937"	.937"	1.250"	1.250"
PRONG RUNNING / PULLING TOOL	4014012000	4014012000	4014012000	4014012000
MATERIAL *	Norm Alloy	Norm Alloy	Norm Alloy	Norm Alloy

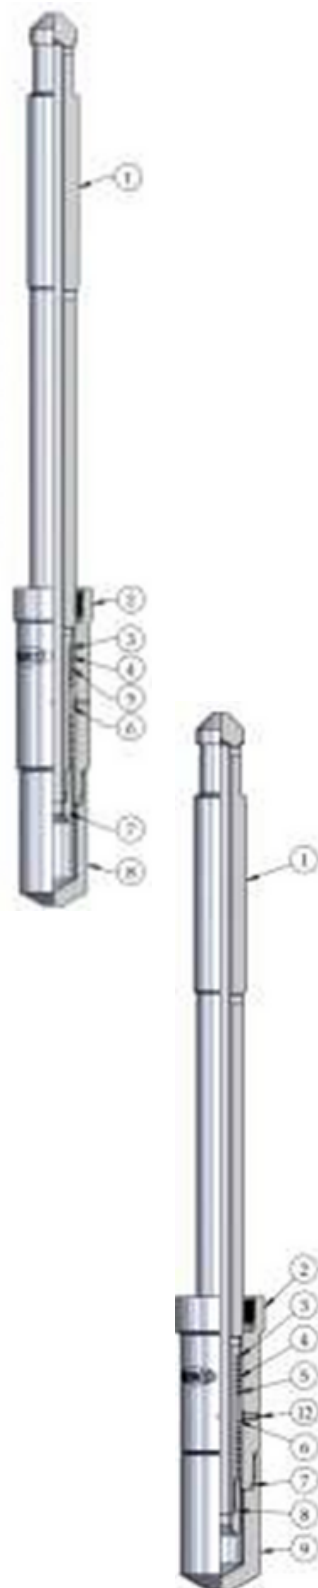

* Norm Alloy is suitable for H2S Service (NACE MR-01-75, Latest Revision)



SECTION XV: EQUALIZING SUB-ASSEMBLIES and ACCESSORIES

Type '**ROTPR**' Equalizing Prong and Valve Sub-Assembly:

TECHNICAL DATA

NIPPLE SEAL BORE	2.813"	2.875"	3.437"
SUB-ASSEMBLY NUMBER	24111328130	24111328730	24111334330

ENGINEERING DATA:

MAXIMUM OD (NO-GO)	2.808"	2.870"	3.431"
BOX THREAD CONNECTION	2 1/4" - 12 SLB	2 1/4" - 12 SLB	2 3/4" - 12 SLB
PRONG FISHING NECK SIZE	1.375"	1.375"	1.750"
PRONG LENGTH	25.0"	25.0"	36.0"
LENGTH	28.0"	28.0"	38.5"
'V' PACKING OD	1.250"	1.250"	1.500"
PRONG RUNNING / PULLING TOOL	4014012000	4014012000	4014012500
MATERIAL *	Norm Alloy *	Norm Alloy *	Norm Alloy *

* Norm Alloy is suitable for H2S Service (NACE MR-01-75, Latest Revision)




TECHNICAL DATA

NIPPLE SEAL BORE	3.688"	3.813"	4.125"	4.313"
SUB-ASSEMBLY NUMBER	24111336830	24111338130	24111341230	24111343130

ENGINEERING DATA:

MAXIMUM OD (NO-GO)	3.682"	3.807"	4.119"	4.307"
BOX THREAD CONNECTION	3 1/16" - 12 SLB	3 1/16" - 12 SLB	3 1/4" - 12 SLB	3 1/4" - 12 SLB
PRONG FISHING NECK SIZE	2.313"	2.313"	2.313"	2.313"
PRONG LENGTH	34.84"	34.84"	34.84"	34.84"
LENGTH	37.15"	37.38"	38.1"	38.83"
'V' PACKING OD	1.500"	1.500"	2.313"	2.313"
PRONG RUNNING / PULLING TOOL	4014013000	4014013000	4014013000	4014013000
MATERIAL *	Norm Alloy *	Norm Alloy *	Norm Alloy *	Norm Alloy *

* Norm Alloy is suitable for H2S Service (NACE MR-01-75, Latest Revision)





SECTION XV: EQUALIZING SUB-ASSEMBLIES
and ACCESSORIES

Type 'ROTPR' Equalizing Prong and Valve Sub-Assembly:

TECHNICAL DATA		
NIPPLE SEAL BORE	4.562"	4.813"
SUB-ASSEMBLY NUMBER	24111345630	24111348130
ENGINEERING DATA:		
MAXIMUM OD (NO-GO)	4.556"	4.808"
BOX THREAD CONNECTION	3 3/4" – 12 SLB	4" – 12 SLB
PRONG FISHING NECK SIZE	3.125"	3.125"
PRONG LENGTH	38.98"	38.98"
LENGTH	42.52"	42.52"
'V' PACKING OD	2.313"	2.313"
PRONG RUNNING / PULLING TOOL	4014014000	4014014000
MATERIAL *	Norm Alloy *	Norm Alloy *



TECHNICAL DATA	
NIPPLE SEAL BORE	5.875"
SUB-ASSEMBLY NUMBER	24111358730
ENGINEERING DATA:	
MAXIMUM OD (NO-GO)	5.870"
BOX THREAD CONNECTION	5 1/16" – 8 SLB
PRONG FISHING NECK SIZE	3.125"
PRONG LENGTH	52.62"
LENGTH	32.84"
'V' PACKING OD	1.500"
PRONG RUNNING / PULLING TOOL	4014014000
MATERIAL *	Norm Alloy *



* Norm Alloy is suitable for H2S Service (NACE MR-01-75, Latest Revision)



SECTION XV: EQUALIZING SUB-ASSEMBLIES
and ACCESSORIES

Type 'ROTPR' Equalizing Prong and Valve Sub-Assembly:

TECHNICAL DATA	
NIPPLE SEAL BORE	5.963"
SUB-ASSEMBLY NUMBER	24111359630
ENGINEERING DATA:	
MAXIMUM OD (NO-GO)	5.958"
BOX THREAD CONNECTION	5 1/16" – 8 SLB
PRONG FISHING NECK SIZE	3.12"
PRONG LENGTH	38.98"
LENGTH	42.52"
'V' PACKING OD	2.313"
PRONG RUNNING / PULLING TOOL	40051436804
MATERIAL *	Norm Alloy *

* Norm Alloy is suitable for H2S Service (NACE MR-01-75, Latest Revision)

