



SECTION XIV: LOCK MANDRELS

Type 'ROTRQ' Lock Mandrel Assembly with Safety Spring and Shear Pin(s)

Rebco Type 'ROTRQ' Lock Mandrels with Safety Spring and Shear Pin(s) are Top No-Go Lock Mandrels designed to land and lock Sub-Surface Safety Valves in Type 'ROTRQ' Landing Nipples.


Other Sizes (not listed) are available, please inquire

TECHNICAL DATA

NIPPLE SEAL BORE	3.813"	4.125"	4.562"	6.000"
ASSEMBLY NUMBER	18131238130	18131241230	18131245630	18131260030

ENGINEERING DATA:

LOCK ID	2.62"	2.75"	3.12"	4.125"
FISHING NECK ID	3.12"	3.12"	4.00"	5.38"
PACKING OD (Max)	3.83"	4.14"	4.58"	6.018"
NO-GO RING OD	3.86"	4.19"	4.63"	6.10"
LENGTH	14.37"	19.6"	14.69"	14.18"
MATERIAL *	Norm Alloy	Norm Alloy	Norm Alloy	Norm Alloy
BOTTOM THREAD	3 1/16"-12 SLB	3 1/4"-12 SLB	4"-12 SLB	5 1/16"-8 SLB
RUNNING TOOL - Type 'ROTRX'	41131838113	41131841210	41131845611	41131860010
PULLING TOOL - 'ROTGR'	40051336804	40051436804	40051345600	40051359600

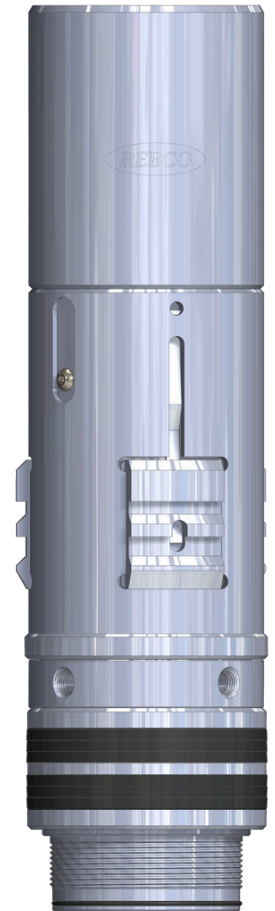

Large Size Lock Mandrels are available, please Inquire.



6"